



PSG85 INT.R 内建电阻
PSG85R EXT.R 外加振荡电阻

枪声
8声5灯IC

SOUND EFFECT

PSG85/85R



FEATURES 功能叙述

- 8 different sounds in one key.
- Non-retriggerable.
- RD: Randomly output.
- K9-OFF: K9 (SCAN) disabled.
- L1→L5 LED.

APPLICATION 产品应用

- Toys, TV/Arcade game etc.


K	PSG85/ PSG85R	PSG85R-1
K1	RIFLE	45 手枪
K2	RIFLE (ECHO)	雷射枪
K3	TV GAME	RIFLE (ECHO)
K4	DUAL TONE	45 快炮
K5	BOMBING 1	BOMBING 2
K6	BOMBING 2	机关枪
K7	GUN 1	M16
K8	GUN 2	GUN
K9	SCAN	SCAN
	Rosc=150KΩ	Rosc=200KΩ

ELECTRICAL CHARACTERISTICS 电气规格


(@V_{DD}=3V unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作电压 Operating Voltage	V _{DD}	—	3	3.5	V	
工作电流 Operating Current	I _{OP}	—	0.1	0.5	mA	No load
静态电流 Quiescent Current	I _{SB}	—	1	5	μA	
推动电流 BZ Driving Current	I _O	1	—	—	mA	@V _{DS} =1V
推动电流 LO Driving Current	I _{OL}	6	—	—	mA	@V _{DS} =1.2V
振荡频率 Oscillator Frequency	F _{OSC}	—	128	—	KHz	±30% TOL.
工作温度 Operating Temperature	Temp.	0	25	60	°C	

APPLICATION DIAGRAM 参考电路图

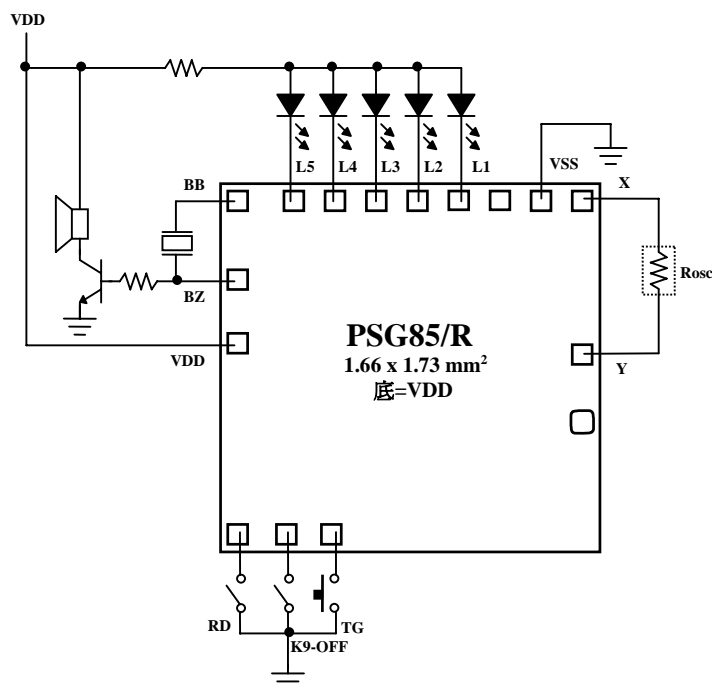

PSG85P/85RP

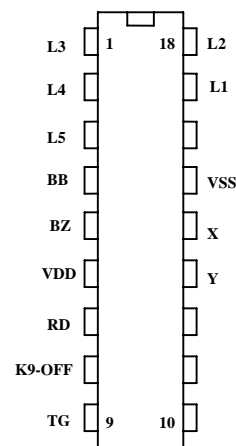

*All specs and applications shown above subject to change without prior notice.

(以上电路及规格仅供参考,本公司得径行修正)