



3 STATES ENCODER
3 態編碼 IC

M3E,

GENERAL DESCRIPTION 功能敘述

The M3E, is a CMOS ASIC decoder. It will en-code 12 parallel input and serially transmit them to the output when \overline{TE} depressed. These address inputs are 3 states i.e. LOW(0) 、 OPEN(X) 、 HIGH(1).


FEATURES 產品特長

- Same Rosc matched to the DECODER M3D / DA / F
- Built-in IR carrier : suffix-IR.
- $3^{12} = 531,411$ codes, "0" 、 "X" 、 "1" Tri-states.
- 4 cycles transmission each time.
- Direct data transmit type : (Elimination \overline{TE} and diodes)
 - M3E,-H : switch to VDD.
 - M3E,-L : switch to VSS.

APPLICATIONS 產品應用

- Car/home alarm system, garage control etc..

BLOCK DIAGRAM 功能方塊圖

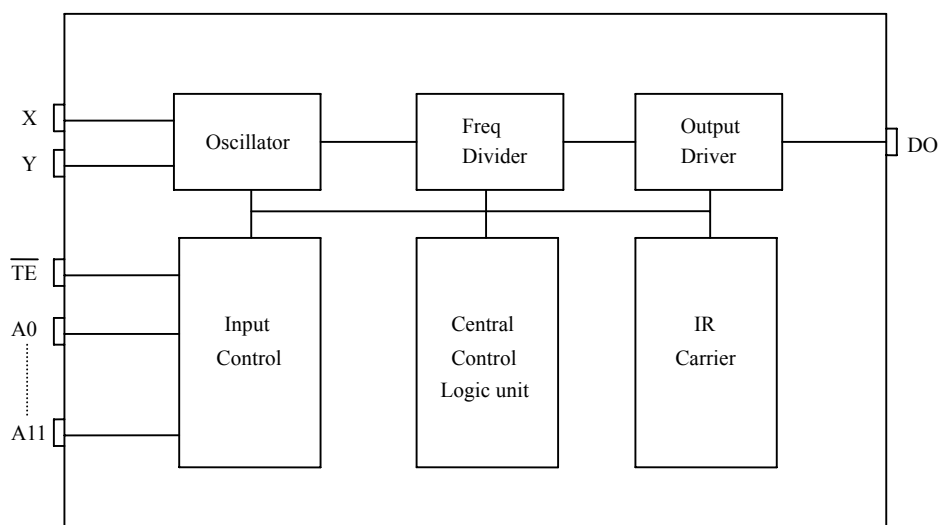

*All specs and applications shown above subject to change without prior notice.

(以上電路及規格僅供參考,本公司得逕行修正)



3 STATES ENCODER
3 態編碼 IC

EN/DECODER

M3E,

ABSOLUTE MAXIMUM RATING

(TA=25°C)


Parameter	Rating	Unit
Supply Voltage	-0.3 to 12	V
Input Voltage	-0.2~V _{DD} +0.2	V
Operating Temperature	-20 to 70	°C
Storage Temperature	-50 to 125	°C

ELECTRICAL CHARACTERISTICS

Characteristics	Sym.	Min.	Typ.	Max.	Unit	Conditions
Operating Voltage	V _{DD}	2.4	—	12	V	
Operating Current	I _{OP}	—	0.1	1	mA	No load
Quiescent Current	I _{SB}	—	0.1	0.5	μA	
Output Drive Current	I _O	—	2	—	mA	@V _{DS} =1.2V
Input Voltage	V _{IH}	V _{DD} -0.2	V _{DD}	V _{DD}	V	
	V _{IL}	V _{SS}	V _{SS}	V _{SS} +0.2		
Oscillator Frequency	Fosc	—	76	—	KHz	External±30%
						Rosc=360KΩ@V _{DD} =12V
						Rosc=430KΩ@V _{DD} =4.5V

PIN DESCRIPTION

No.	M3E,	Description
1~8	A0~A7	3 states address inputs
9	VSS	Negative power supply
10~13	A8~A11 / D0~D3	3 states address inputs / Data input
14	$\overline{\text{TE}}$	Transmit enable
15	Y	Oscillator output
16	X	Oscillator input
17	DO	Data output
18	VDD	Positive power supply

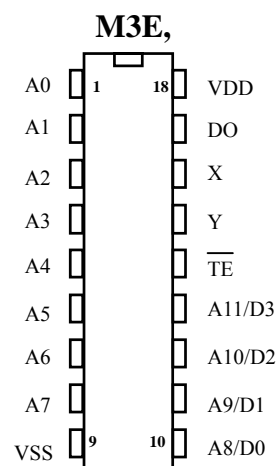




3 STATES ENCODER

3 態編碼 IC


M3E,

TIMING WAVEFORM


(1) Bit Format

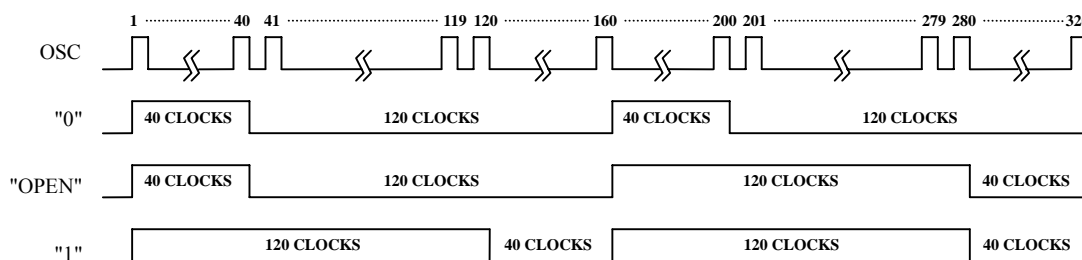

(2) TIMING DIAGRAM

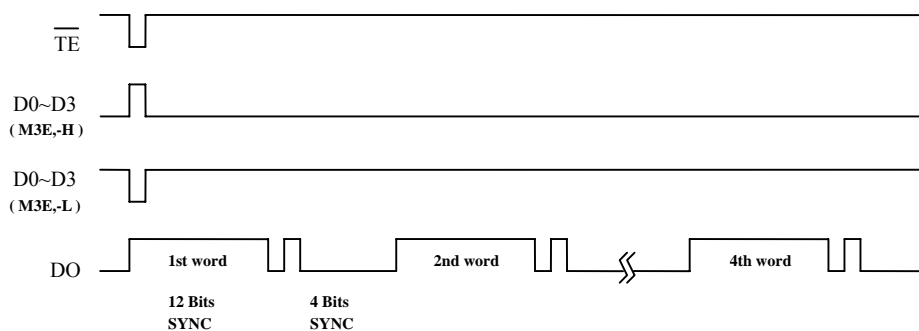

M3E, F-V Curve

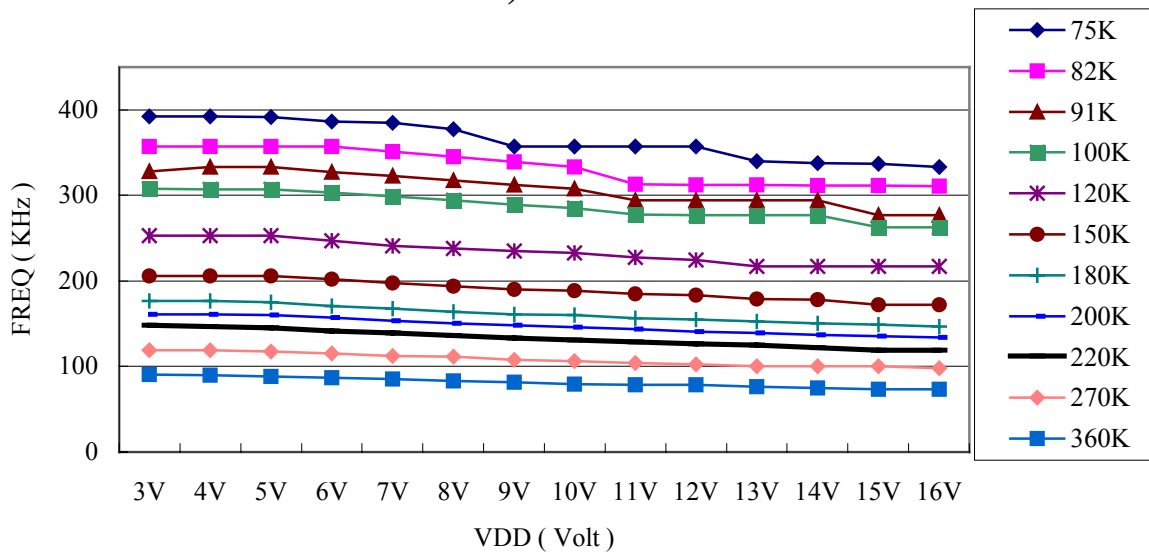




3 STATES ENCODER

3 態編碼 IC

OPERATING FLOWCHART

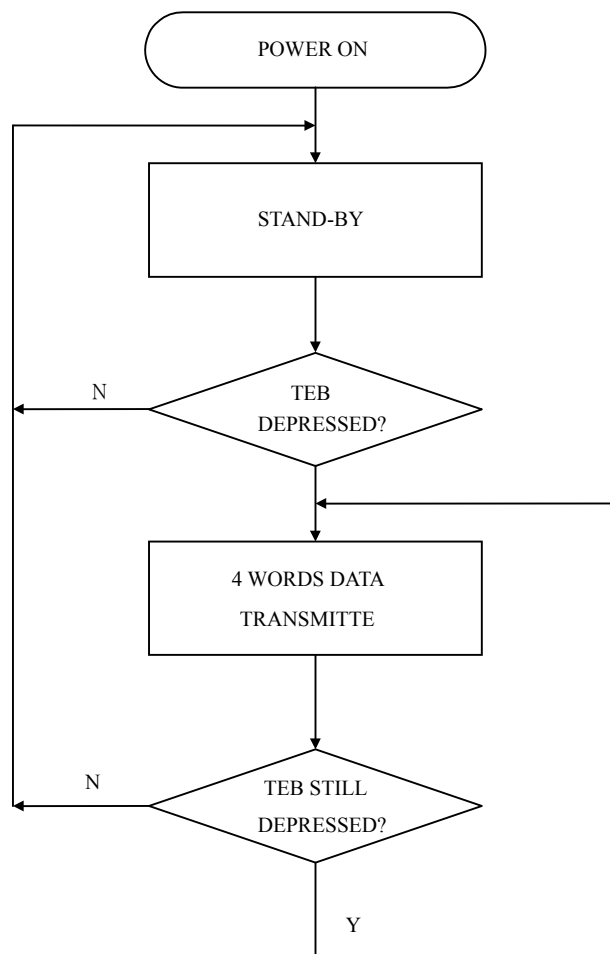



3 STATES ENCODER
3 態編碼 IC

EN/DECODER

M3E,

RECONNENDED OSCILLATOR PARAMETERS


Rosc (KΩ)	M3E, (KHz)
75	357
82	312
91	294
100	277
120	225
150	184
180	155
200	141
220	127
270	103
360	78

DATA OUTPUT

M3E, (D0~D3)	M3D/F (D0~D3)
0 (VSS)	0 (VSS)
X (OPEN)	1 (VDD)
1 (VDD)	1 (VDD)
POWER ON	0 (VSS)

Freq-Rosc Chart

(@Vdd=12V)

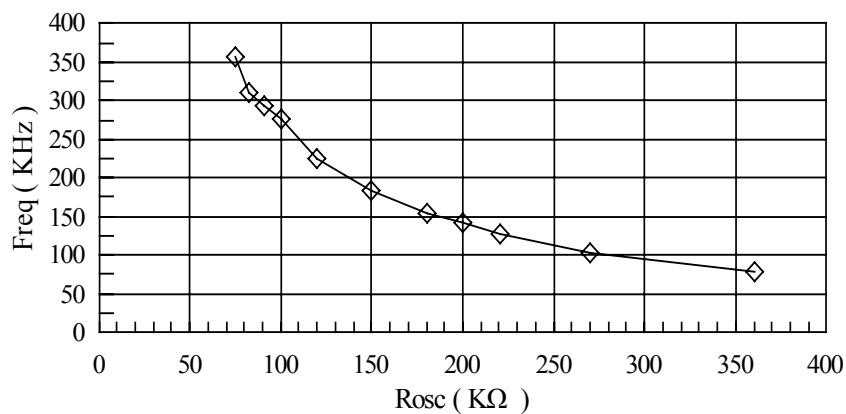

M3E,

◇ M3E/D/F





3 STATES ENCODER

3 態編碼 IC

M3E,

APPLICATION DIAGRAM 參考電路圖



IR 內建發射

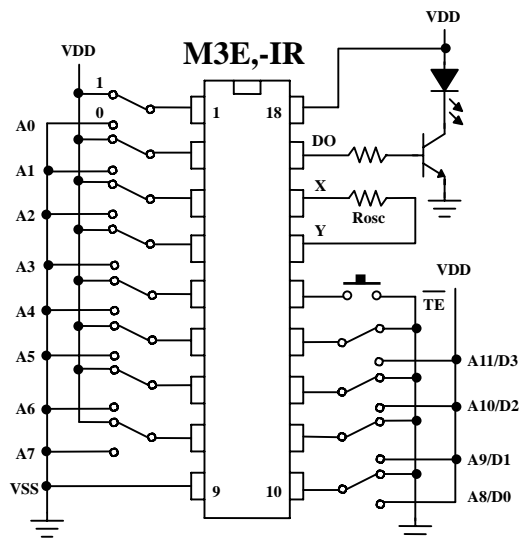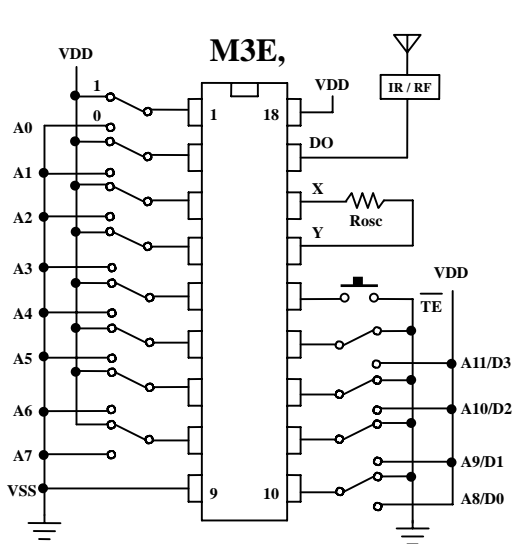

Rosc = 430KΩ @ V_{DD} = 4.5V

直接發射 (VDD)

直接發射 (VSS)

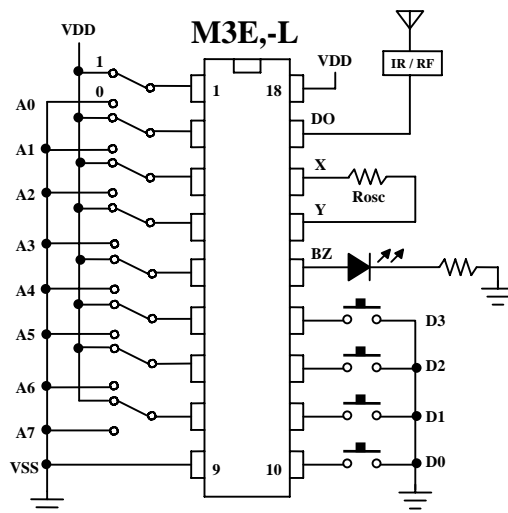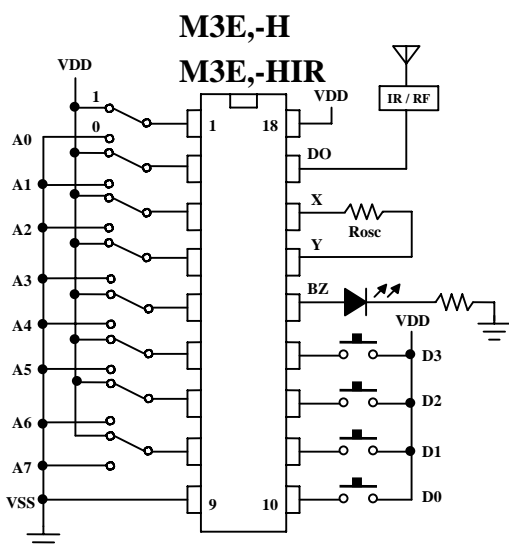

M3E,-HIR : Rosc = 430KΩ @ V_{DD} = 4.5V





3 STATES ENCODER

3 態編碼 IC



M3E,

APPLICATION DIAGRAM 參考電路圖 (SOP PACKAGE)

IR 內建發射

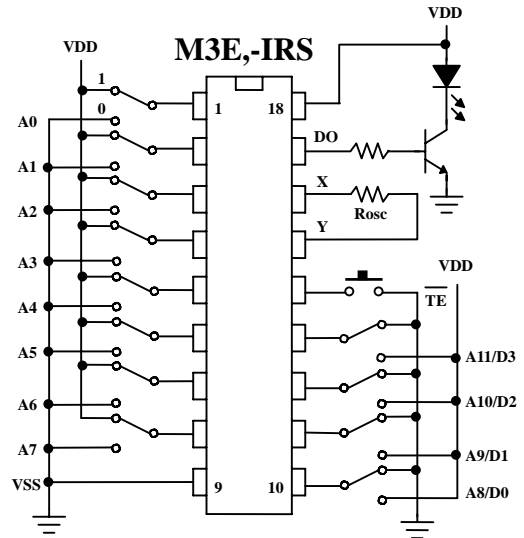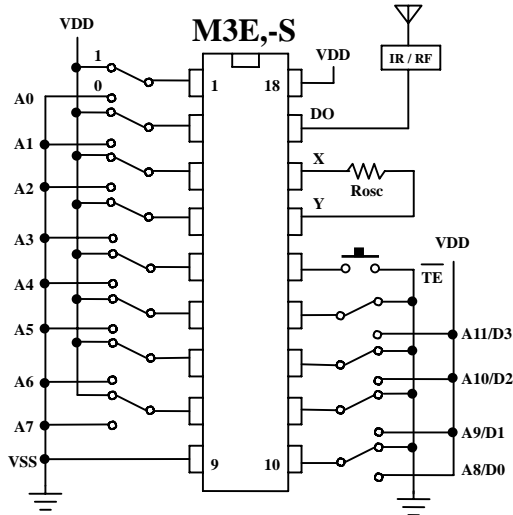

$R_{osc} = 430K\Omega @ V_{DD} = 4.5V$

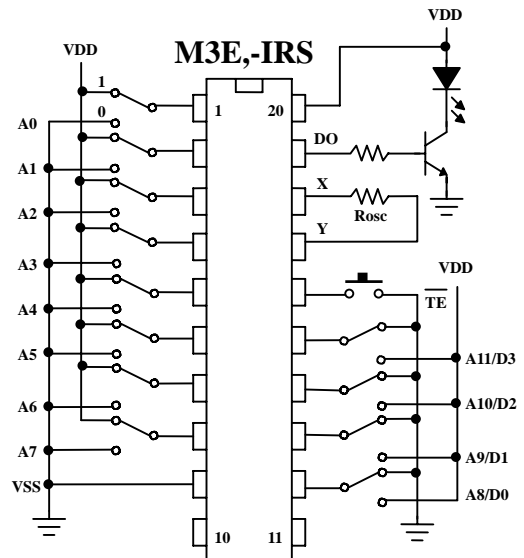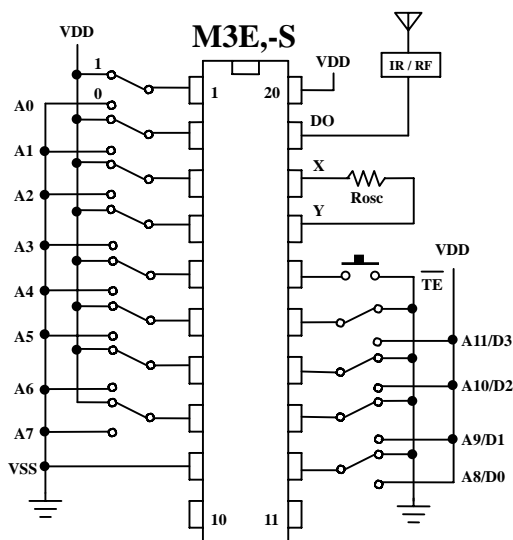



$R_{osc} = 430K\Omega @ V_{DD} = 4.5V$





APPLICATION DIAGRAM 參考電路圖 (SOP PACKAGE)

直接發射 (VDD)

直接發射 (VSS)

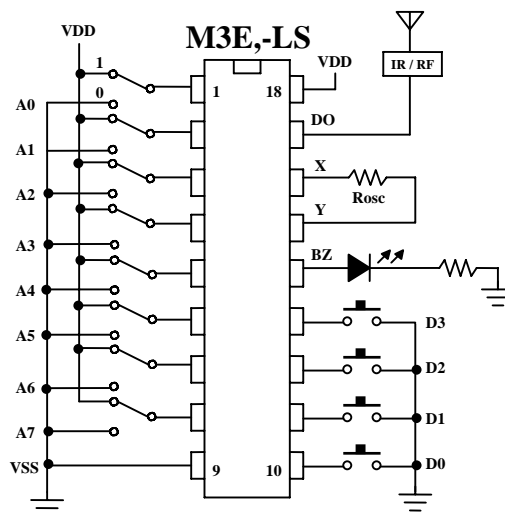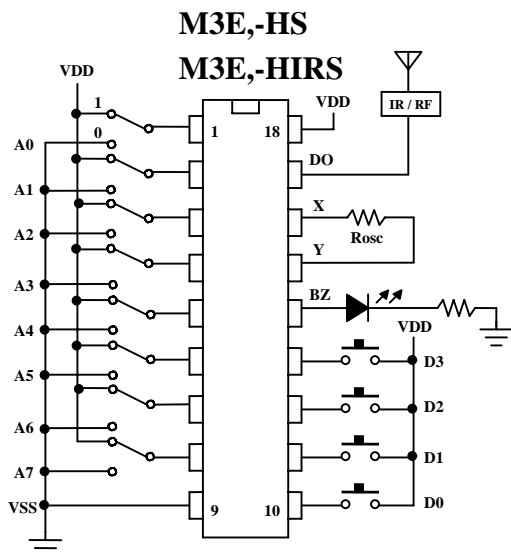

M3E,-HIRS : Rosc = 430KΩ @V_{DD} = 4.5V

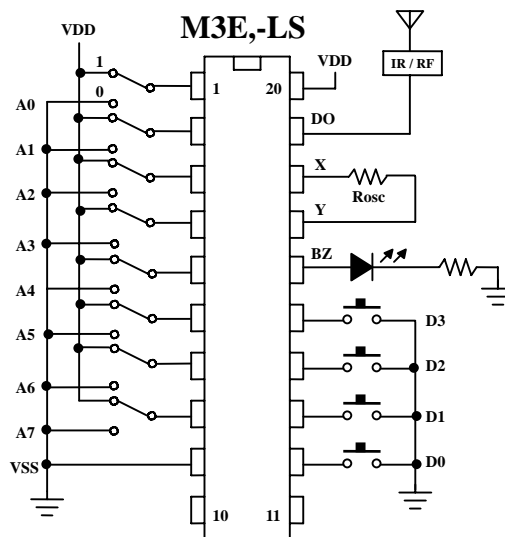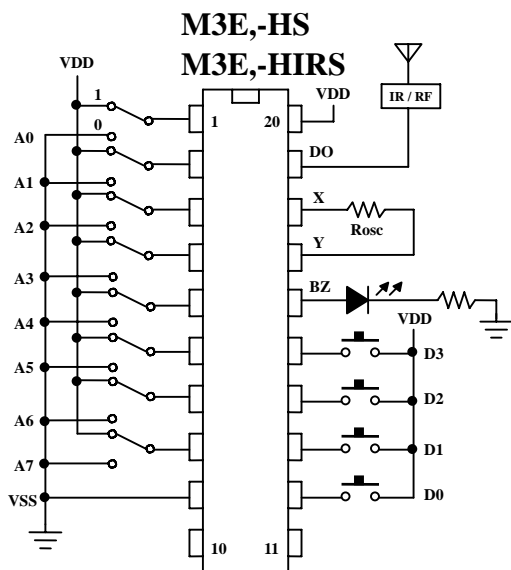

M3E,-HIRS : Rosc = 430KΩ @V_{DD} = 4.5V