



LOTTO

M1738/R




BEEP LOTTO IC

樂透 IC

FEATURES 功能敘述

- L1→L2, L3→L1, L7,L6→L4, L5, L6, L7
→L1, L4, L5, L6, L7→L2, L3, L4, L5, L6, L7



P/N	Rosc
M1738/R	Ext.R
M1738	Int.R

APPLICATION 產品應用


- Lotto game, Toys etc..

ELECTRICAL CHARACTERISTICS 電氣規格

(@V_{DD}=3V unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作電壓 Operating Voltage	V _{DD}	—	3	3.5	V	
工作電流 Operating Current	I _{OP}	—	0.1	0.5	mA	No load
靜態電流 Quiescent Current	I _{SB}	—	1	5	μA	
推動電流 Driving Current	I _{OL}	6	—	—	mA	@ V _{DS} =1.2V
振盪頻率 Oscillator Frequency	F _{OSC}	—	128	—	KHz	External Rosc=200KΩ±30%
工作溫度 Operating Temperature	Temp.	0	25	60	°C	

APPLICATION DIAGRAM 參考電路圖

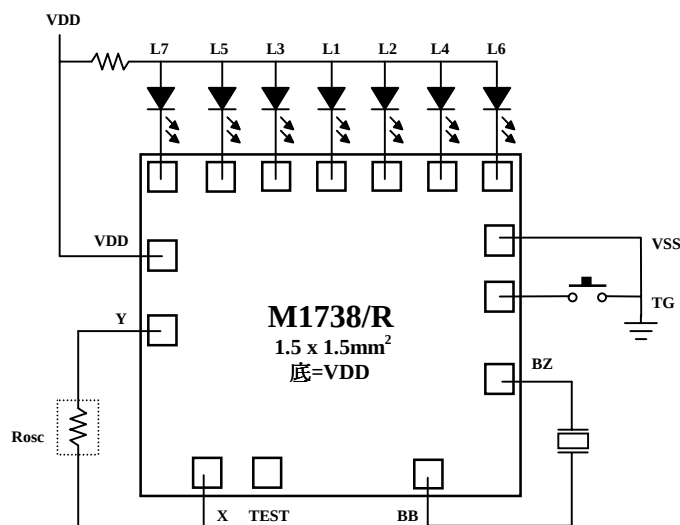

*All specs and applications shown above subject to change without prior notice.

(以上電路及規格僅供參考,本公司得逕行修正)